

Safety Cabinets SC


Flammable Cabinet DS030

Acquired CE and RoHS Certification. Manufactured in accordance with FM for Storage Cabinets (Flammable and Combustible Liquids) Class, OSHA of American Occupational Safety and Health Administration, NFPA CODE 30 of American National Fire Protection Association and Hazardous Chemicals Control Ordinance of Safe Production Supervision and Administration.



Dr Safe Flammable Cabinets for storing flammable liquids (low and median flashpoint liquid), Reduce the risk of fire, to ensure the safety of life and property.

1. All Welded, Double Walled Construction, 16 gauge (1.2mm) Steel Flammable Safety Cabinets reinforced with channel frame all around, base with 20 gauge (2.0mm) add strength.
2. Meet or exceed the NFPA Flammable Liquid Storage Code #30 and the OSHA standard 1910.106 for storage of class I, II, and III liquids.
3. Double walled steel has 1-1/2" (38-mm) insulating air space.
4. Dual 2" vents with built-in flash arresters strategically placed at bottom and opposite top, can connect to an exhaust system to maintain safe temperatures.
5. Build-in grounding connector (on outside side panel) for easy grounding.
6. Galvanized steel shelves are adjustable on 2.2" (55mm) space for versatile storage.
7. 2" (50mm) leak-proof sump to contain spills.
8. Continuous piano hinge doors to open 180 degree.
9. Flush paddle handle on door engages the 3-point locking system. Zinc lever lock. Two keys lock.

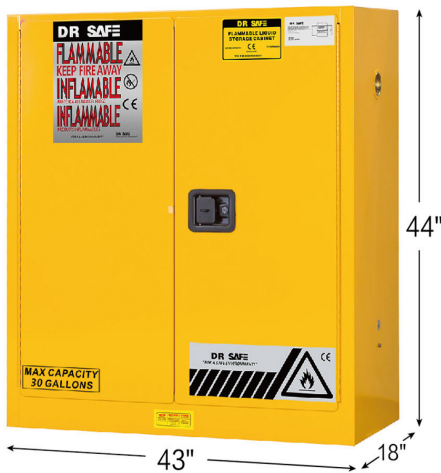

Flammable Cabinet DS030

| Model | Volume (Gal/ L) | Door type | Ext dimension (L x W x H) | Packing dimension (L x W x H) | Adjustable shelf (pcs) | Shelf loading Weight (lb) | N.W. (lb) | G.W. (lb) |
|-------|-----------------|----------------|---------------------------|-------------------------------|------------------------|----------------------------|------------|------------|
| DS030 | 30/ 114 | Double/ Manual | 18 x 43 x 44 | 20 x 45 x 50 | 1 | 350 | 264 | 286 |


Safety Cabinets SC

DS030



All welded construction versus spot welded construction

Sturdy 16gauge (1.2mm) double walled steel. Durable an chemical resistant, powder coat paint finish, inside and outside, retains high gloss look and minimizes the effect of corrosion and humidity.



Continuous piano hinge doors to open 180 degree.



Welded shelf bracket interlock with shelf to offer maximum 'no slip' stability... and no flimsy bracket to lose.



Dual vents with built-in flash arresters strategically placed at bottom and opposite top.



2"(50mm) leak-proof sump to contain spills.



Exclusive paddle lock for extra security. Three-point mutual locking system with high-strength stainless steel bullet latches.



Highly visible warning label "Flammable-Keep Fire Away".



Anti-Static Device to conduct the static to earth, thus to avoid fire accident.