


Carpet Protection Film

Product Specification

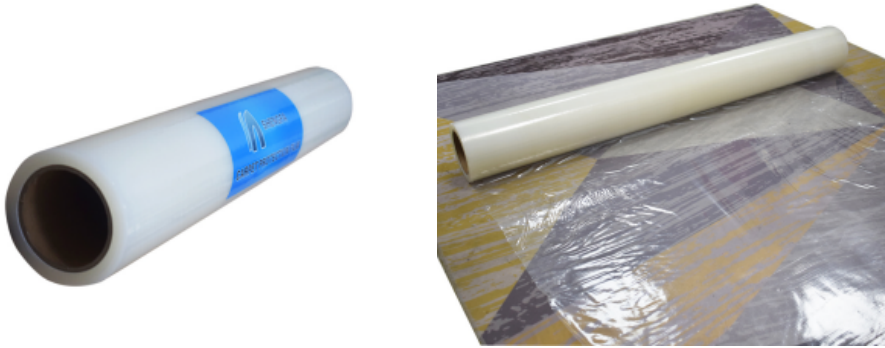

Description:

This kind of PE protective film for carpets has strong adhesion and lasting adhesive on the surface. It can protect your carpets from dust and paint during construction and painting the walls. It's easy to paste on the surface of the carpets and easy to peel off without any residuals left.

| <u>Technical Data:</u> | <u>US</u> | <u>Metric</u> | <u>Test Method</u> |
|-------------------------------|-----------------------------|--|---------------------------|
| Thickness | : 2.5mil | 63.5 μ m | ASTM D882 |
| Adhesive material | : Oil-based Acrylic | ----- | ----- |
| Tensile Strength | : MD 3480 psi TD 3727psi | 244kg/cm ² 262kg/cm ² | ASTM D882 ASTM D882 |
| Elongation | : MD 600% TD 900% | ----- ----- | ASTM D882 ASTM D882 |
| Adhesion | : 17-25 oz/in | 482-709g/25mm | PSTC-1 |

Application:

- ©Indoor carpet
- ©Outdoor carpet
- ©Other types carpet

Storage Conditions:

The Product has to be stocked in a dry environment, at a temperature about 32°F- 104°F. This product must be protected from dust, humidity, fire and direct sun exposure. It must be stored horizontally and kept in the original packaging.