

※ Specifications

- Luminous Efficiency: 100~110LM/W and 130~140LM/W for option
- LED Type: High lumen efficacy SMD2835 led chips
- Color Temperature: 3000K 4000K 5000K 6000K
- Power: 20W 40W 60W 80W 120W
- Beam Angle: 120°
- LED Driver: 88% efficiency, flicker free, THD<15
- LED Driver Output: DC36-42V
- Function: Non-Dimmable or 1-10V Dimmable
- CRI: 80Ra, 90Ra, 95Ra for option
- Certification: Compliance with ETL DLC CE ROHS standard
- Working Temperature: -30~50°C
- 5 years warranty for overall products




※ Data sheet

Standard Lumen Version

Part no.	Size	Power	LEDs	AC Input	Efficiency(±5%)	Lumen output
HNX-TP65-20W2F-H	L600*W91*H75mm	20W	120	AC100~277V 50/60HZ	100~110LM/W	2000~2200LM
HNX-TP65-40W4F-H	L1200*W91*H75mm	40W	240	AC100~277V 50/60HZ	100~110LM/W	3920~4200LM
HNX-TP65-60W4F-H	L1200*W91*H75mm	60W	360	AC100~277V 50/60HZ	100~110LM/W	5880~6300LM
HNX-TP65-60W5F-H	L1500*W91*H75mm	60W	360	AC100~277V 50/60HZ	100~110LM/W	5880~6300LM
HNX-TP65-80W5F-H	L1500*W91*H75mm	80W	432	AC100~277V 50/60HZ	100~110LM/W	7840~8400LM
HNX-TM-120W8F-H	L2400*W91*H75mm	120W	728	AC100~277V 50/60HZ	100~110LM/W	12000~12600LM

Premium Lumen Version

Part no.	Size	Power	LEDs	AC Input	Efficiency(±5%)	Lumen output
HNX-TP65-20W2F-H	L600*W91*H75mm	20W	120	AC100~277V 50/60HZ	130~140LM/W	2700~2800LM
HNX-TP65-40W4F-H	L1200*W91*H75mm	40W	240	AC100~277V 50/60HZ	130~140LM/W	5400~5600LM
HNX-TP65-60W4F-H	L1200*W91*H75mm	60w	360	AC100~277V 50/60HZ	130~140LM/W	8040~8280LM
HNX-TP65-60W5F-H	L1500*W91*H75mm	60W	392	AC100~277V 50/60HZ	130~140LM/W	8040~8280LM
HNX-TP65-80W5F-H	L1500*W91*H75mm	80W	432	AC100~277V 50/60HZ	130~140LM/W	10800~11040LM
HNX-TM-120W8F-H	L2400*W91*H75mm	120W	728	AC100~277V 50/60HZ	130~140LM/W	15960~16800LM

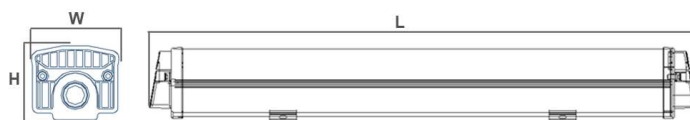

Above lumen efficacy is for CRI 80ra with frosted diffuser, then 10% increased up with clear strip diffuser. If with higher CRI 90 or CRI 95, then the lumen efficacy will be decreased by 10%.

✂ Installation Diagram




Ceiling

Suspend


Installation Accessories
Stainless 304 Material



A: Ceiling Installation

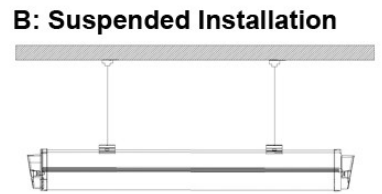

B: Suspended Installation




C: Serial / Linkable Connection

✂ Wiring Diagram



UL Certified 16 AWG rubber cable

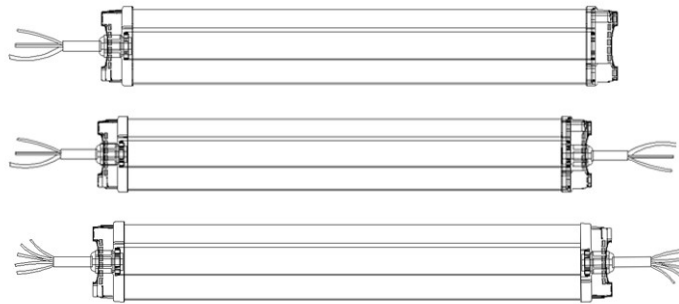


0/1-10V Dimmable

UL Certified 16 AWG rubber cable


Item code	US market-3wire cable
L	Black
N	White
E	Green

Item code	US market-5wire cable
L	Black
N	White
E	Green
DIM+	Red
DIM-	Orange

✂ Package



Model	Qty	GW(KG)	Package Size(cm)
HNX-TP65-20W2F-H	6pcs/Carton	10KG	70*24*31cm
HNX-TP65-40W4F-H		16KG	130*24*31cm
HNX-TP65-60W4F-H		16.5	130*24*31cm

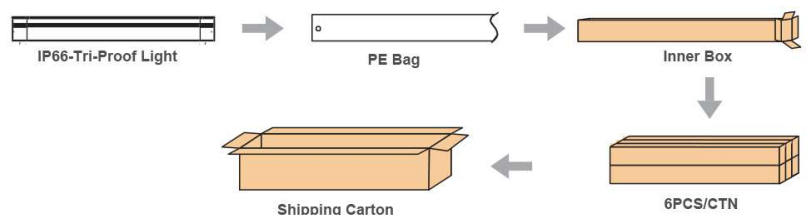

Shenzhen Hongnaxin Technology CO.,LTD (HonLight)

Address: A2 Building, Langxin Industrial Park, Youth Road, Shiyan Town, Bao'an District, Shenzhen city, 518108, Guangdong Province, China

TEL:0755-23017585 FAX:0755-23075967 Phone:+86 15814422535 E-mail: vanessa@hongnaxin.com Website:www.hongnaxin.com