


Hard Floor Protection Film Product Specification

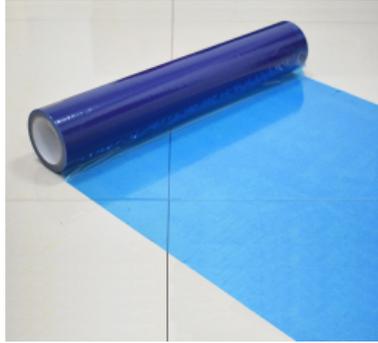

Description:

This blue PE hard floor protection film can be used for laminate floor, wooden floor and marble floor. It's easy to paste on the surface of the hard floor and easy to peel off without any residuals left.

<u>Technical Data:</u>	<u>US</u>	<u>Metric</u>	<u>Test Method</u>
Thickness	: 3 mil	76.2 μ m	ASTM D882
Adhesive material	: Water-based Acrylic	-----	-----
Tensile Strength	: MD 3408 psi TD 3263 psi	239kg/cm ² 229kg/cm ²	ASTM D882 ASTM D882
Elongation	: MD 500% TD 700%	----- -----	ASTM D882 ASTM D882
Adhesion	: 2-4.5 oz/in	57-128g/25mm	PSTC-1

Application:

- ©Laminate floor
- ©Wooden floor
- ©Artificialmarble floor

Storage Conditions:

The Product has to be stocked in a dry environment, at a temperature about 32°F- 104°F. This product must be protected from dust, humidity , fire and direct sun exposure. It must be stored horizontally and kept in the original packaging.