
## IMT Series LED Lighting

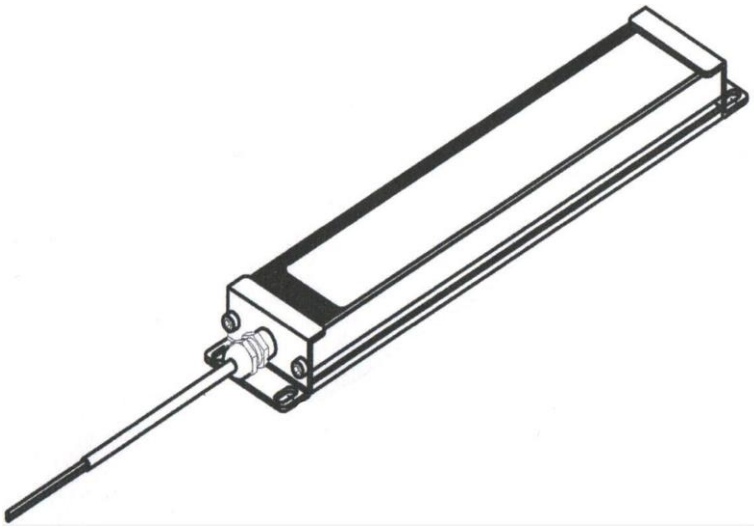


The lighting shell is made of alumina oxide and stainless steel. Luminous place uses tempered glass. The whole lighting is waterproof、oil-resistant and anti-corrosion. Anti-dazzle treatment, no dazzling. Ultra-thin design of whole lighting. Especially suitable for environmental lighting such as mechanical interior, outdoor wall, special worktable, etc.

- Alumina oxide and stainless steel
- Good heat dissipation
- Waterproof and dustproof with IP67
- Ultra-thin lamp design greatly reduces the installation space
- Input voltage of DC 24V

# Specifications

| Light Source | Color Temperature | Working Temperature | Protect Level | Product Certification |
|---|---|---|---|---|
| SMD LED | 6000K~6500K | -30℃~50℃ | IP67 | CE、RoSH |

# Installation size diagram

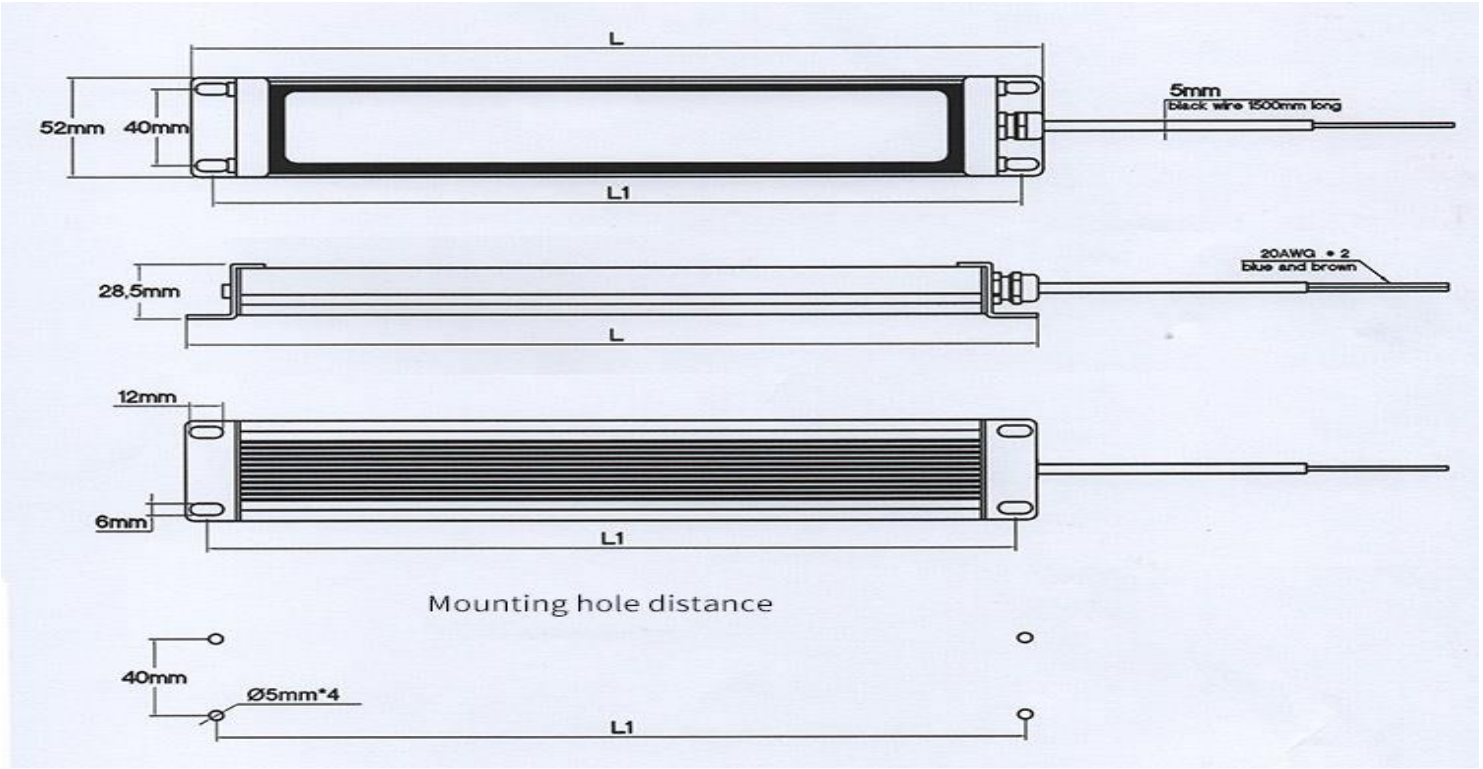

# Models

| Model | Voltage Input | Power Consumption | Luminous Flux | Shade Material | Size | |
|---|---|---|---|---|---|---|
| | | | | | L1 | L |
| IMT-305-12W | DC24V | 12W | 1440LM | Toughened glass | 290mm | 305mm |
| IMT-435-18W | DC24V | 18W | 2160LM | Toughened glass | 420mm | 435mm |
| IMT-565-24W | DC24V | 24W | 2880LM | Toughened glass | 550mm | 565mm |
| IMT-695-30W | DC24V | 30W | 3600LM | Toughened glass | 680mm | 695mm |
| IMT-825-36W | DC24V | 36W | 4320LM | Toughened glass | 810mm | 825mm |