

Macro Series LED Tri-proof Light



※ Specifications

- Tool Free for Rewiring or Linkable
- Luminous Efficiency: 100-110LM/W and 130-140LM/W for option
- LED Type: High lumen efficacy SMD2835 led chips
- Color Temperature: 3000K 4000K 5000K 6000K
- Power: 40W 60W
- Beam Angle: 120°
- LED Driver: 90% efficiency, flicker free, THD < 15
- CRI: > 83ra
- Certification: ETL DLC CETL FCC certified
- Working Temperature: -30~50°C
- 5 years warranty for overall products




※ Data sheet

Standard Lumen Version

Part no.	Size	Power	LEDs	AC Input	Efficiency(±5%)	Lumen output
HNX-TM65-40W4F	L1200*W76*H67mm	40W	240	AC100-277V 50/60HZ	100~110LM/W	4000~4400LM
HNX-TM65-60W5F	L1500*W76*H67mm	60W	336	AC200-240V 50/60HZ	100~110LM/W	6000~6600LM


Premium Lumen Version

Part no.	Size	Power	LEDs	AC Input	Efficiency(±5%)	Lumen output
HNX-TM65-40W4F	L1200*W76*H67mm	40W	240	AC100-277V 50/60HZ	130~140LM/W	5200~5600LM
HNX-TM65-60W5F	L1500*W76*H67mm	60W	336	AC100-277V 50/60HZ	130~140LM/W	7800~8400LM

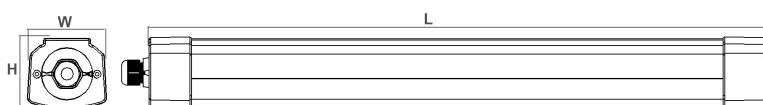

Above lumen efficacy is for CRI 80ra with frosted diffuser, then 10% increased up with clear strip diffuser. If with higher CRI 90 or CRI 95, then the lumen efficacy will be decreased by 10%.

✂ Installation Diagram

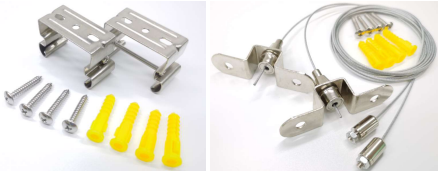

Ceiling


Suspend

Installation Accessories
Stainless 304 Material


A: Ceiling Installation



B: Suspended Installation

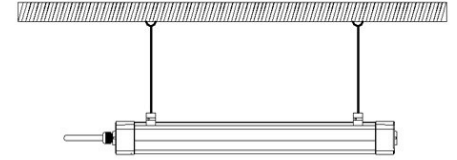

C: Serial/Linkable Connection



✂ Wiring Diagram



16AWG Cable




Note: Tool Free Wiring by Twistable End Cap & Quick Terminal Block

✂ Package



Model	Qty	GW(KG)	Package Size(cm)
HNX-TM65-40W4F	9pcs	19.0	134*29*26
HNX-TM65-60W5F		22.0	164*29*26

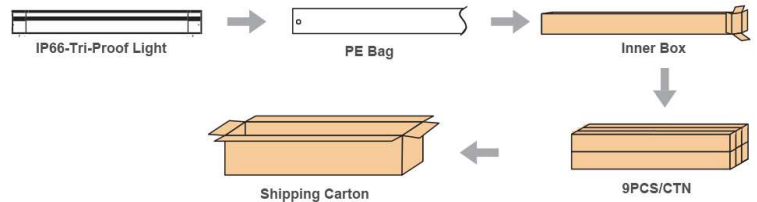

Shenzhen Hongnaxin Technology CO.,LTD (HonLight)

Address: Blog A2, Langxin Industrial Park, Youth Road, Shiyan Town, Bao'an District, 518108, Shenzhen, China

Tel:0755-23017585 Fax:0755-23075967 Phone:+86 15814422535 E-mail: vanessa@hongnaxin.com Website:www.hongnaxin.com