

User Manual Of JWAT401 Phone



Table of Contents

1. Overview.....	3
2. Main technical parameters.....	3
3. How to Use.....	3
4. Product Dimensions and Installation.....	4
5. Transportation and storage requirements.....	4
6. Unpacking and inspection.....	5
7. Attention.....	5
8. Safety warnings.....	5
9. After sales.....	5

1. Overview

JWAT401 telephone is a high-tech product that combines the actual needs of dangerous and aseptic places. It is widely used in dust-free workshops of chemical plants, pharmaceutical factories, and clean room workshops. It is an indispensable and extremely ideal industrial communication product.

1.1 Product Features

1.1.1 Except for the internal circuit board, the whole machine is made of 304 stainless steel. The surface of the phone is brushed;

1.1.2 All openings and edges are cut by non-marking laser cutting;

1.1.3 The surface is completely flat by the keys, without unevenness;

1.1.4 The surface is waterproof and dustproof, with a built-in waterproof speaker;

1.1.5 The stainless steel material is acid and alkali resistant, and has strong chemical resistance. Various cleaning agents can be used for surface cleaning;

1.1.6 Hands-free design to avoid cross contamination;

1.1.7 The built-in circuit of the phone has strong anti-interference ability, and the call sound quality is stable and clear;

2. Main technical parameters

2.1 Signal voltage: DC48V

2.2 Standby, working current: $\leq 1\text{mA}$

2.3 Frequency response: 300~3400 Hz

2.4 Ring tone level: $\geq 80\text{dB}$

2.5 Anti-corrosion grade: WF2

2.6 Protection level: IP54

2.7 Specification: 237*133*44mm


2.8 Net weight: 1KG

3. How to Use

3.1. Press the button to automatically enter the hands-free state, enter the called number, and the other party answers, then the call can be normal; press the button, the machine hangs up and the call ends.

4. Product Dimensions and Installation

4.1 product dimensions

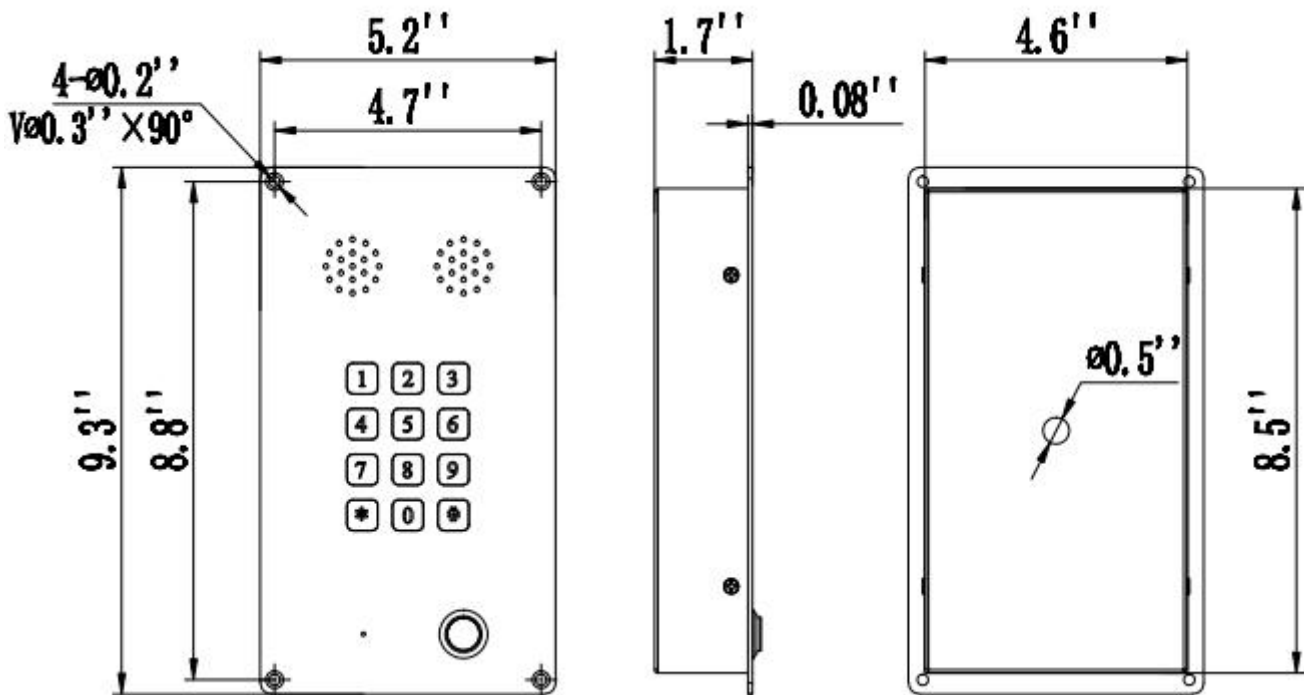

4.2 Installation and Wiring:

4.2.1. Reserve a suitable space on the wall to be installed, insert it into the wall, and fix it with four M4 stainless steel countersunk screws.

4.2.2. Insert the telephone cable into the phone holder on the main board, and then clip the upper case to the lower case from top to bottom. Be careful not to press on the internal circuit, and then lock the upper and lower with screws.

5. Transportation and storage requirements

5.1 During transportation, the product is not allowed to be subjected to severe mechanical shock or direct sunlight and rain, to prevent falling, collision, and heavy pressure.

5.2 The product should be stored in a dry, clean, well-ventilated environment at ambient temperature (0-40 °C), in a non-corrosive medium warehouse, away from fire and heat sources.

6. Unpacking and inspection

6.1 Check that the instruction manual, product certificate, product warranty card and accessories in the box are complete.

6.2 The appearance of the product shall be checked and the marking shall be complete.

7. Attention

7.1 Please read this manual before use to understand the product performance and use methods, so as to avoid accidents and damage to the product due to mis-operation.

7.2 The product should be checked carefully before use to ensure that it is installed and used without damage by external forces.

7.3 The product should be stored in a cool, clean and dry environment.

8. Safety warnings

8.1 It is strictly forbidden to disassemble the product and replace parts without permission.

8.2 It is strictly forbidden to install or repair under power, otherwise it will cause danger.

8.3 Cruel hitting the product is strictly prohibited.

8.4 When the product fails, it is strictly forbidden to repair in the danger area.

8.5 Never open the cover with power on.

9. After sales

The Warranty of Joiwo products is 2 years. Within 2 years since the products are shipped, if there is any quality issue or technical requirements, we will take care of all the trouble shooting and send the spare parts or complete product as required for replacements at our charge.

If you have any questions about using this product, please contact Ningbo Joiwo Explosionproof directly (Detail contact information pls see cover).