





VT-3A


Door Type Washer & Dishwasher

HACCP/CE Certified


| TECHNICAL DATA                                | MODEL:VT-3A                |
|---|----------------------------|
| Max. Machine capacity (rack/hr.)              | 60 racks/hr, 1080 dishes/h |
| Cycle time (sec/cycle)                        | 60/90                      |
| Size (inch)                                   | 29.44 × 27.1 × 64.2        |
| Loading height(inch)                          | 17.71                      |
| Heating method                                | Electricity                |
| Washing temp. (°F)                            | 140 ~ 149                  |
| Water tank capacity (GAL)                     | 9.247                      |
| Wash pump (KW)                                | 0.9                        |
| Wash tank heater(KW)                          | 5                          |
| Rinsing temp. (°F)                            | 175~185                    |
| Rinse pump(KW)                                | 0.28                       |
| Booster tank capacity(GAL)                    | 2.11                       |
| Booster heater(KW)                            | 9                          |
| Rinsing time(s)                               | 8~12                       |
| Rinse Agent Feeder                            | 1/8NPT                     |
| Rinse usage(GAL/rack)                         | 0.79                       |
| Max. Water flow (GAL/hr.)                     | 47.55 (energy-saving)      |
| Total Electrical loading(KW)                  | 14.9                       |
| Water inlet temp. (°F)                        | > 113(recommended)         |
| Water inlet hose (inch)                       | 3/4                        |
| Drain pipe (inch)                             | 1.57 or 2                  |
| Water flow pressure (lbf/in <sup>2</sup> )PSI | 14 ~ 42                    |
| Air deflector (CFM)                           | 300                        |
| Net weight (LB)                               | 275.3                      |
| Breaker(Amp.)when208~220V-60hz-3              | 50                         |

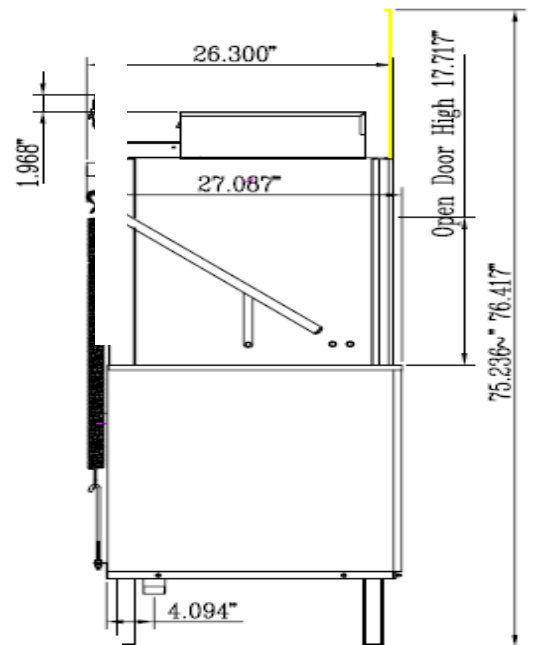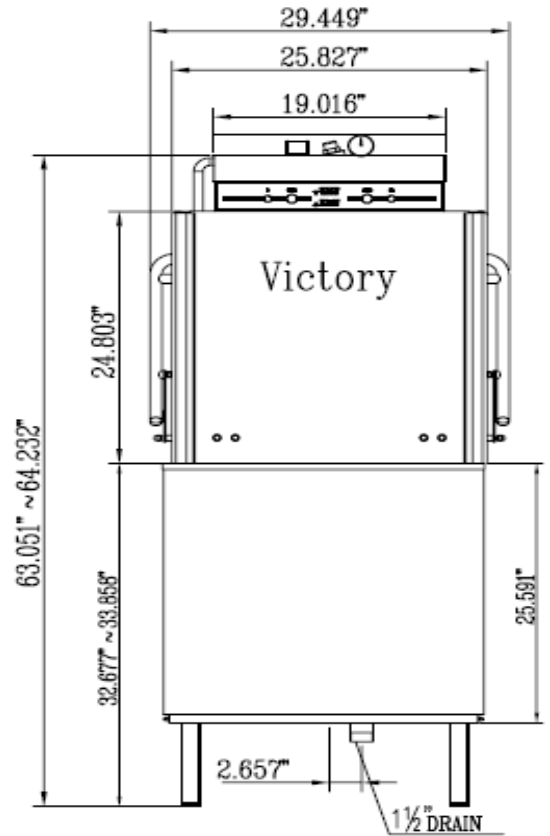

450 (DOOR OPEN HEIGHT)

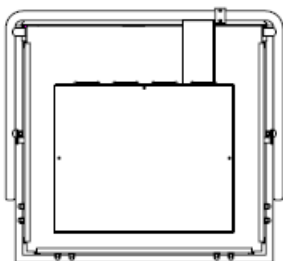

NOTE: All size measured in inch

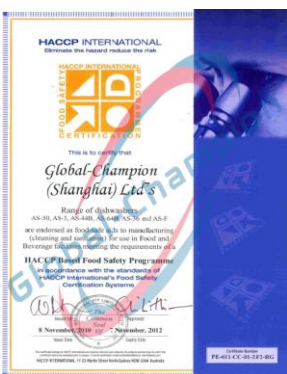

**PROWELL STANDARD INC. PROFESSIONAL DISHWASHER**

